## 1 Model identification

The Covers IP65 sealing series includes 4 items:

3	
1300.21.001	Adapter 72x72 to 48x48 - BLACK plastic with transparent cover
1300.21.001R	Adapter 72x72 to 48x48 - RED plastic with transparent cover
1300.21.002	Adapter 48x96 to 32x74 - BLACK plastic with transparent cover
1300.21.002R	Adapter 48x96 to 32x74 - RED plastic with transparent cover

## 2 General features

Operating temperature	Temperature: -1055° C	
Sealing	Adapter: IP65 (with gasket) - Trasparent cover: protection for dust (IP20) and shocks	
Material for frontal adapter and fixing clamp	Nylon PA 6,6 30% GFR	
Material for cover	PC UL94V2 self-extinguishing	
Material for gasket	Silicone rubber	

## 3 Frontal panel cut-out

1300.21.001 (model "R" for red version)	1300.21.002 (model "R" for red version)
67,5 x 67,5 mm	43,5 x 91,5 mm
Frontal panel	Frontal panel
cut-out	cut-out

Read carefully the safety guidelines and programming instructions contained in this manual before using/connecting the device.





## PIXSYS s.r.l.

www.pixsys.net sales@pixsys.net - support@pixsys.net online assistance: http://forum.pixsys.net

via Po, 16 I-30030 Mellaredo di Pianiga, VENEZIA (IT) Tel +39 041 5190518






Covers IP65 sealing





Installation

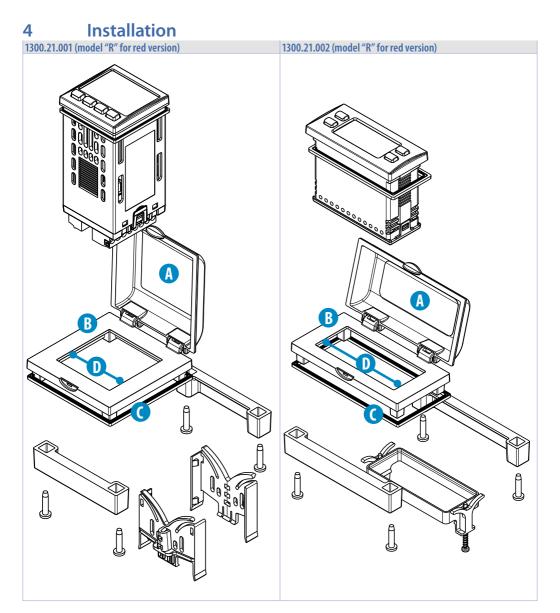

A	Transparent cover in Polycarbonate
B	Adapter 72x72 and 48x96 in Nylon PA
0	Gasket in Silicone rubber for IP65 sealing
D	Cut-Out area for Pixsys 48x48 and 32x74 series