


# PPH600 SWI600



## Ethernet **Switch** **Portal Gateway**

- ✓ Compact and solid metal case
- ✓ DIN-Rail mounting – 24V DC power supply
- ✓ Pixsys Portal VPN – Remote Control and Assistance tool

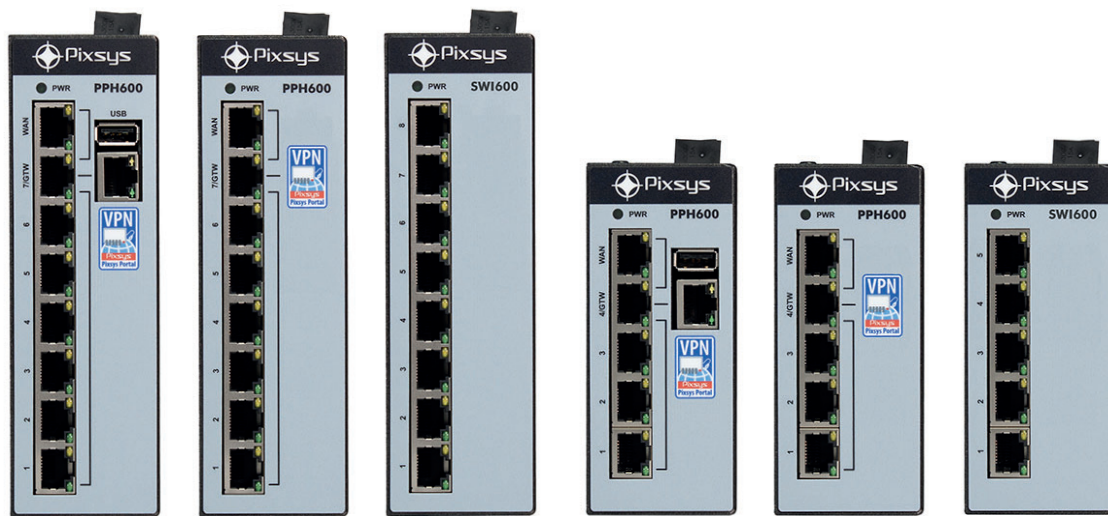

Pixsys Srl

Via Po 16, I - 30030 Mellaredo di Pianiga VE  
Ph. +39 041 519 0518 Mail [sales@pixsys.net](mailto:sales@pixsys.net)





PPH600  
with Pixsys Portal integrated



PPH600  
with external Pixsys Portal or VLAN



SWI600  
Switch

## MAIN FEATURES

POWER SUPPLY	24V DC +/- 10%, 3Watt/VA
OPERATING CONDITIONS	Temperature 0-45°C, humidity 35..95 RH%
MATERIAL - WEIGHT	Box: Metal, Front: self-extinguishing Polyester
SEALING	IP20 (box and terminal blocks) - Terminal blocks: Extractable
PIXSYS PORTAL (VPN) OR VLAN	Remote control and assistance service

ETHERNET SWITCH	SWI600-5A	SWI600-8A
POWER SUPPLY	24V DC	
LAN PORTS	5	8
WAN PORTS	-	-
PLC PORTS	-	-
USB PORTS	-	-

PIXSYS PORTAL GATEWAY	PPH600-30A	PPH600-60A	PPH600-31A	PPH600-61A
POWER SUPPLY	24V DC			
LAN PORTS	3	6	3	6
WAN PORTS	1	1	1	1
PLC PORTS	1	1	-	-
USB PORTS	-	-	1	1
INTEGRATED PIXSYS PORTAL	-	-	yes	yes

## ORDERING CODES

SWI600-5A	ETHERNET SWITCH 5LAN, 24V DC
SWI600-8A	ETHERNET SWITCH 8LAN, 24V DC
PPH600-30A	ETHERNET SWITCH 3LAN, 1WAN, 1PLC ports, 24V DC
PPH600-60A	ETHERNET SWITCH 6LAN, 1WAN, 1PLC ports, 24V DC
PPH600-31A	PIXSYS PORTAL GATEWAY 3 LAN, 1WAN ports, 1 USB 24V DC
PPH600-61A	PIXSYS PORTAL GATEWAY 6 LAN, 1WAN ports, 1 USB 24V DC